



UBA 优霸精密计量泵



UBA 电动旋转阀型泵 --- E-R 系列

- E-R 系列优霸精密计量泵，采用精密陶瓷旋转阀控制液体的输入和输出，精密研磨的陶瓷柱塞保证了稳定精准的液体容量计量；步进马达或伺服马达驱动精密的丝杆驱动系统，通过彩色触摸屏设置所有注液参数，无需对泵进行任何机械调整，能精准控制注液量。
- 极高的计量精度和重复一致性；精度优于正负千分之五。
- 适合用于中高粘度液体和含颗粒液体，酱料、膏体的定量灌装。伺服电机配置的泵特别适合高速自动碱锰电池生产线上注锌膏。
- 316 不锈钢的泵结构。


UBA Servo Drive Rotary Valve Pump

With a precise ceramic rotary valve, the UBA Rotary Valve Style Dispensing Pumps are designed for dispensing medium to high viscosity liquid, gel or the liquid contain particles.

Stepper motor or Servo Motor with precision ball screw driving system provides an extremely precise linear motion control. All dispensing parameters are set by a control box with color touch panel, no need mechanical adjustment. Dispensing accuracy within $\pm 0.5\%$.

Servo motor pumps are suitable for Zinc-gel filling on high speed alkaline battery line.

316 stainless steel pump construction.

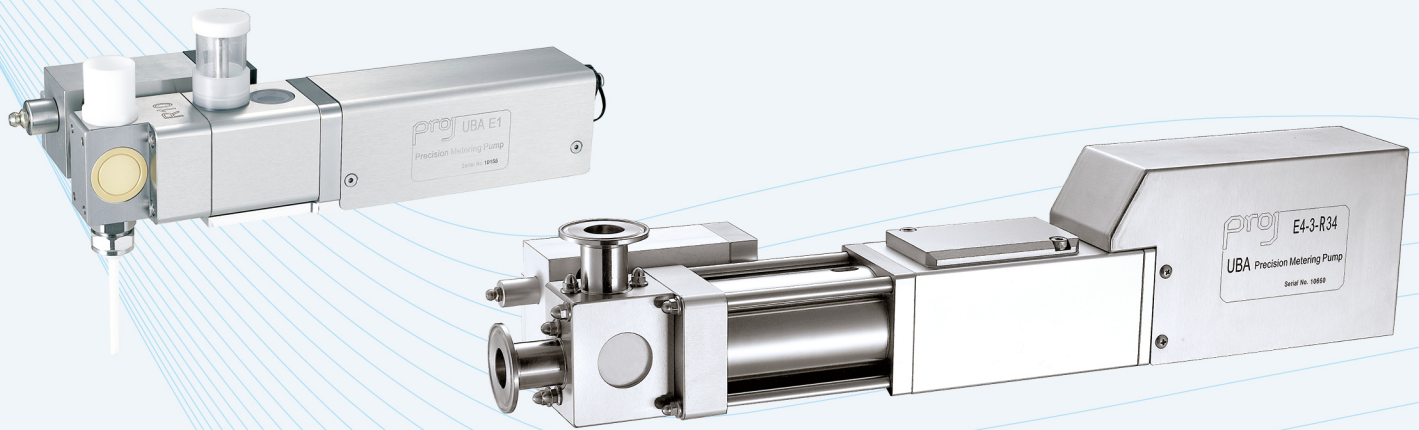

应用：碱性电池锌膏、凡士林、酱料、液态焊锡、睫毛膏、唇膏、黄油、验血管胶料、硅油、农药等

Application: Zinc-Gel of Alkaline Battery, Petroleum Jelly, Gel, Mascara, Liquid Stannum, Lipstick, Grease, Silicone Oil, Blood Testors, Pesticide and more....

型号 Model	柱塞直径 Plunger Dia	行程 Stroke	注液量范围 Dispensing Vol	循环速度 Cycle Rate	驱动电机 Motor	
	MM	MM	ML	次 / 分钟 CCP	电机 Motor	气动 Pneumatic
E1-R03	4.7	12.7	0 - 0.23	0-50	步进电机 / 伺服电机 Stepper Motor or Servo Motor	50-75 PSI
E1-R05	7.9		0 - 0.63			
E1-R07	11.1		0 - 1.2			
E1-R10	15.9		0 - 2.5			
E2-R12	19.1	25.4	0 - 7.2	0-50		
E2-R14	22.2		0 - 9.8			
E2-R17	27		0 - 14.5			
E2-R20	31.8		0 - 20			
E3-R20	31.8	38.1	0 - 30	0-40		
E3-R26	41.3		0 - 50			
E4-1-R34	54.0	25.4	0-58	0-60	伺服电机 Servo Motor	
E4-2-R34	54.0	50.8	0-116	0-40		
E4-3-R34	54.0	76.2	0-174	0-30		
E4-4-R34	54.0	114.3	0-261	0-25		